


Red LED unit 12-30V AC/DC base cage clamp



Technical Data

Series	MM
Illumination	illuminated
Colour	Red
Make-up	LED
IP Rating	IP20
Rated impulse withstand voltage [Uimp] (V)	6000
Rated insulation voltage [Ui] (V)	500
Overvoltage category/pollution degree	III / 3
shock resistance	30G
Ambient temperature Open (°C)	-25°C...+70°C
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Standards	IEC/EN 60947, VDE 0660
Tightening torque (Nm)	0,80
Mounting position	any
Connection cross section, single wire (mm²)	0,75 - 2,5
Connection cross-section, multi-wire (mm²)	0,5 - 2,5
Type No.	M22-CLEDC-R

Maßbild

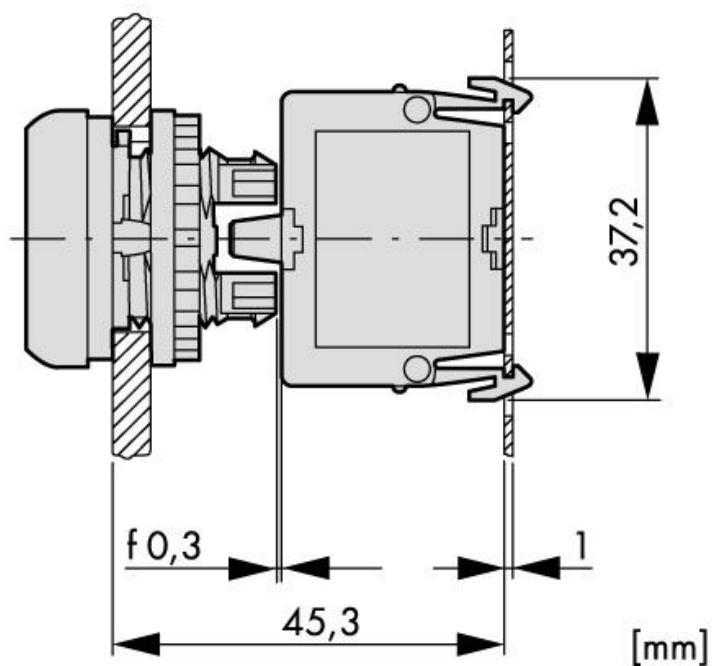

Article Table

DESCRIPTION	Order No.
Red LED unit 12-30V AC/DC base cage clamp	MM216573