

cont. ass. f. star-delta (weye-delta) start, I/O-Link AC-3, 11 kW/400 V, 24 V
DC 3-pole, size S0 screw terminals electrical and mechanical interlock 3
NO + 3 NC integrated



- product brand name
product designation
product type designation
manufacturer's article number
- 1 of the supplied contactor
 - 2 of the supplied contactor
 - 3 of the supplied contactor
 - of the supplied RS assembly kit
 - of the supplied function module for communication

SIRIUS
Contactor assembly for star-delta (weye-delta) start
3RA24

[3RT2024-1BB40-0CC0](#)
[3RT2024-1BB40](#)
[3RT2024-1BB40](#)
[3RA2923-2BB1](#)
[3RA2711-1CA00](#)

General technical data

- size of contactor
product extension auxiliary switch
shock resistance at rectangular impulse
- at AC
 - at DC
- shock resistance with sine pulse
- at AC
 - at DC
- mechanical service life (switching cycles)
- of contactor typical
 - of the contactor with added auxiliary switch block typical
- reference code according to IEC 81346-2
Substance Prohibitance (Date)

S0
No

7,5g / 5 ms, 4,7g / 10 ms
10g / 5 ms, 7,5g / 10 ms

11,8g / 5 ms, 7,4g / 10 ms
15g / 5 ms, 10g / 10 ms

10 000 000
10 000 000

Q
10/01/2009

Ambient conditions

- installation altitude at height above sea level maximum
ambient temperature
- during operation
 - during storage

2 000 m

-25 ... +60 °C
-55 ... +80 °C

Main circuit

- number of poles for main current circuit
number of NO contacts for main contacts
number of NC contacts for main contacts
operating voltage
- at AC-3 rated value maximum
- operational current
- at AC-3
 - at 400 V rated value
- operating power
- at AC-3
 - at 400 V rated value
 - at 500 V rated value

3
3
0

690 V

25 A

11 kW
15.6 kW

— at 690 V rated value	19 kW
operating frequency	
• at AC-3 maximum	1 000 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
• at DC rated value	24 V
closing power of magnet coil at DC	13.8 W
holding power of magnet coil at DC	13.8 W
Auxiliary circuit	
number of NC contacts for auxiliary contacts	
• instantaneous contact	3
number of NO contacts for auxiliary contacts	
• instantaneous contact	3
contact reliability of auxiliary contacts	< 1 error per 100 million operating cycles
UL/CSA ratings	
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A
— with type of assignment 2 required	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A
• for short-circuit protection of the auxiliary switch required	fuse gG: 10 A
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
height	101 mm
width	135 mm
depth	181 mm
required spacing	
• with side-by-side mounting	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— downwards	6 mm
— at the side	6 mm
• for grounded parts	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— at the side	6 mm
— downwards	6 mm
• for live parts	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— downwards	6 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
• at contactor for auxiliary contacts	Screw-type terminals
• of magnet coil	Screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1 ... 2.5 mm²), 2x (2.5 ... 10 mm²)
— solid or stranded	2x (1 ... 2.5 mm²), 2x (2.5 ... 10 mm²)
— finely stranded with core end processing	2x (1 ... 2.5 mm²), 2x (2.5 ... 6 mm²), 1x 10 mm²
• at AWG cables for main contacts	2x (16 ... 12), 2x (14 ... 8)
type of connectable conductor cross-sections	

- for auxiliary contacts
 - solid or stranded
 - finely stranded with core end processing
- at AWG cables for auxiliary contacts

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
 2x (20 ... 16), 2x (18 ... 14)

Safety related data

B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
• with low demand rate according to SN 31920	40 %
• with high demand rate according to SN 31920	75 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 y
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Communication/ Protocol

product function bus communication	No
protocol is supported AS-Interface protocol	No
product function control circuit interface with IO link	Yes

Certificates/ approvals

General Product Approval

Declaration of Conformity

Test Certificates

Marine / Shipping

[Confirmation](#)



[Special Test Certificate](#)



Marine / Shipping



other

Railway

Dangerous Good

[Confirmation](#)

[Vibration and Shock](#)

[Transport Information](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2423-8XE32-1BB4>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2423-8XE32-1BB4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2423-8XE32-1BB4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2423-8XE32-1BB4&lang=en


Characteristic: Tripping characteristics, I_t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RA2423-8XE32-1BB4/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2423-8XE32-1BB4&objecttype=14&gridview=view1>

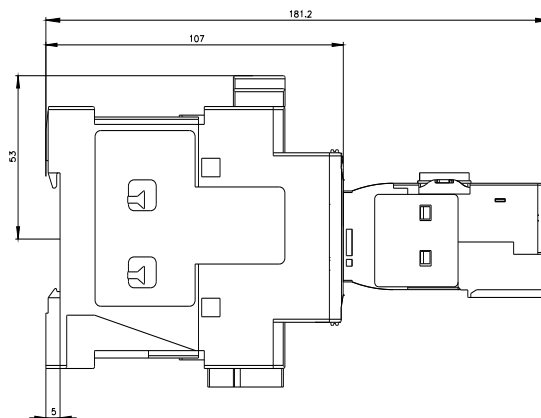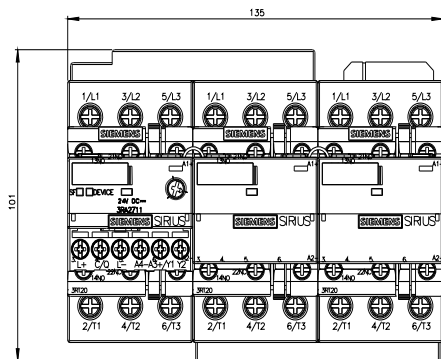

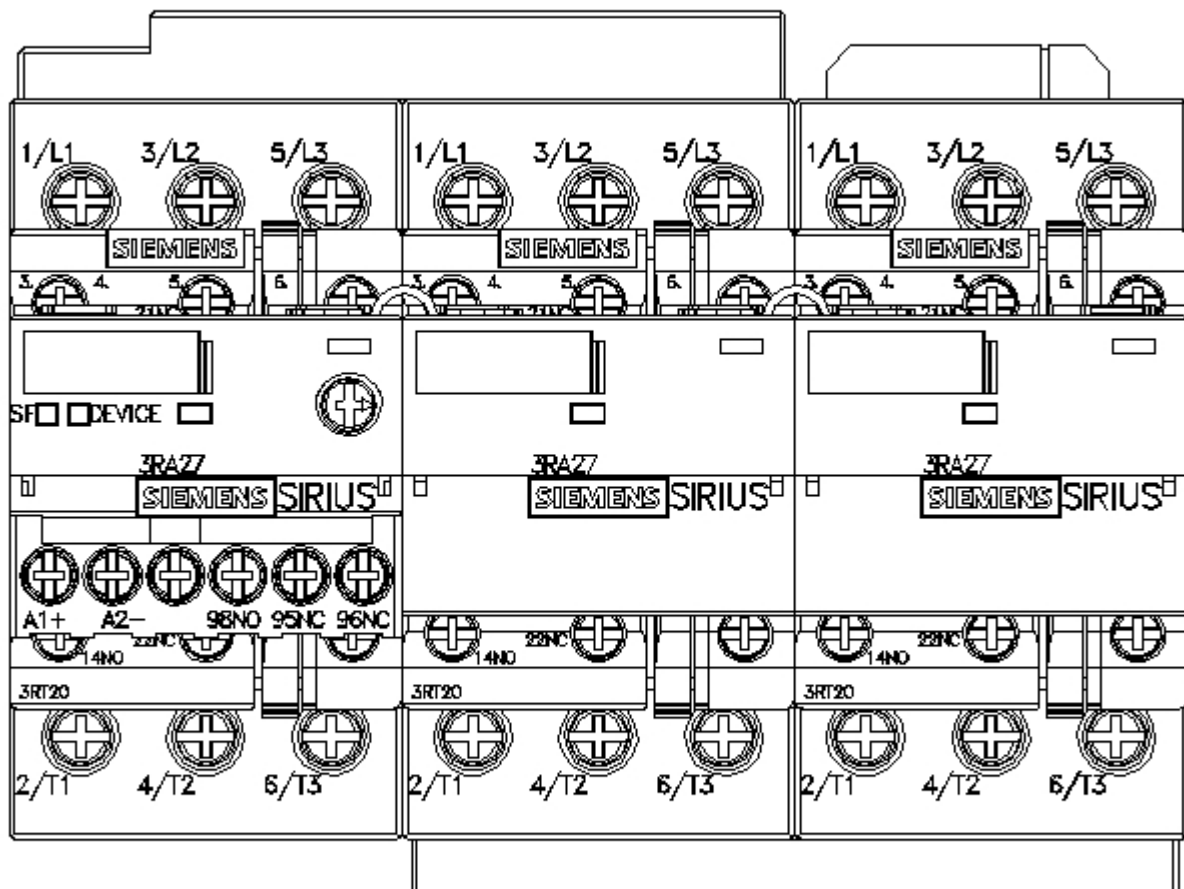

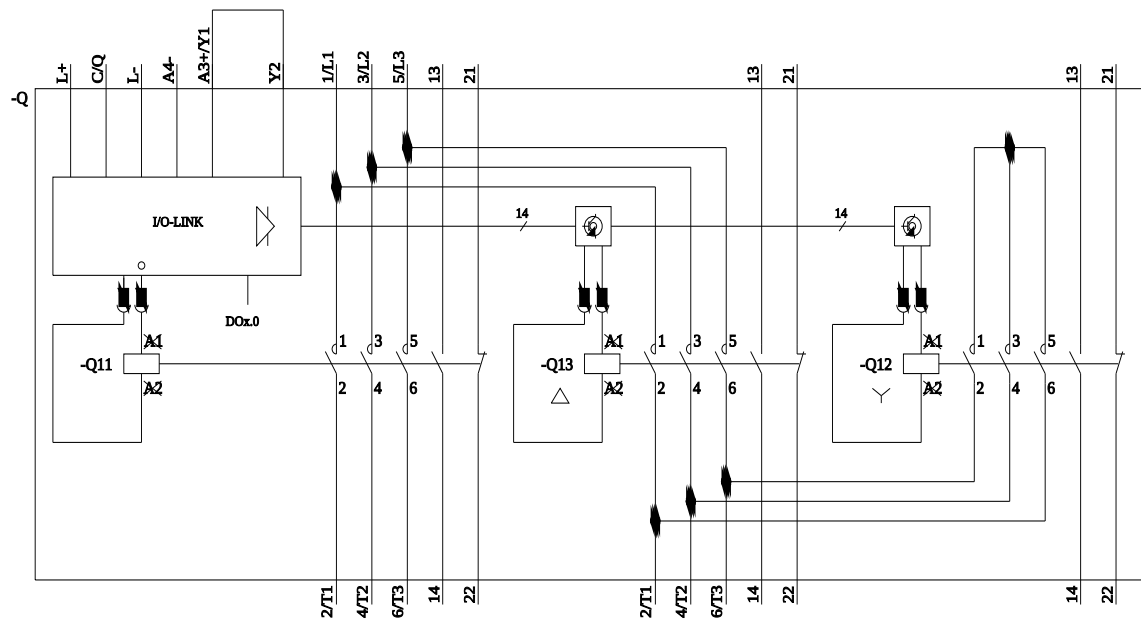

last modified:

12/1/2021 