


## DATASHEET: HRC-FUSE-BASE SIZE 1, 2XM10, 3POLE, 250A

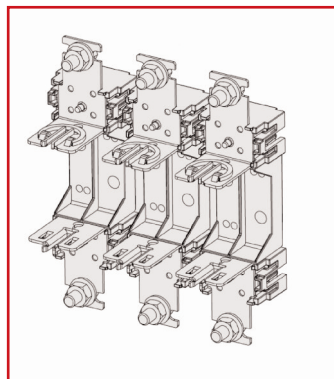

### SCHRACK INFO


NH-fuse-base for baseplate mounting

- NH-fuses size 1 according DIN VDE 0636-2 / IEC 60269-2 to f

### TECHNICAL DATA

|                                                  |                                          |
|--------------------------------------------------|------------------------------------------|
| Size                                             | NH1                                      |
| poles                                            | 3                                        |
| Applicable for fuse-links                        | NH1                                      |
| Rated operating voltage                          | 690V                                     |
| Rated operating current                          | 250A                                     |
| Conv. free air thermal current with fuse-links   | 250A                                     |
| Conv. free air thermal current with solid links  | 325A                                     |
| Rated frequency                                  | 40 - 60Hz                                |
| Max. permissible power dissipation per fuse-link | 32W                                      |
| Ambient temperature                              | -25 up to +55°C                          |
|                                                  | >35°C derating of rated current required |
| Duty type                                        | Continuous duty                          |
| Mounting position                                | vertical / horizontal                    |
| Altitude                                         | 2000m                                    |
| Pollution degree                                 | 3                                        |
| Overvoltage category                             | III                                      |
| Degree of protection                             | IP00                                     |
| Cable terminal                                   | Flat terminal M10                        |
| Protective cover                                 | No                                       |

**DIMENSIONS**

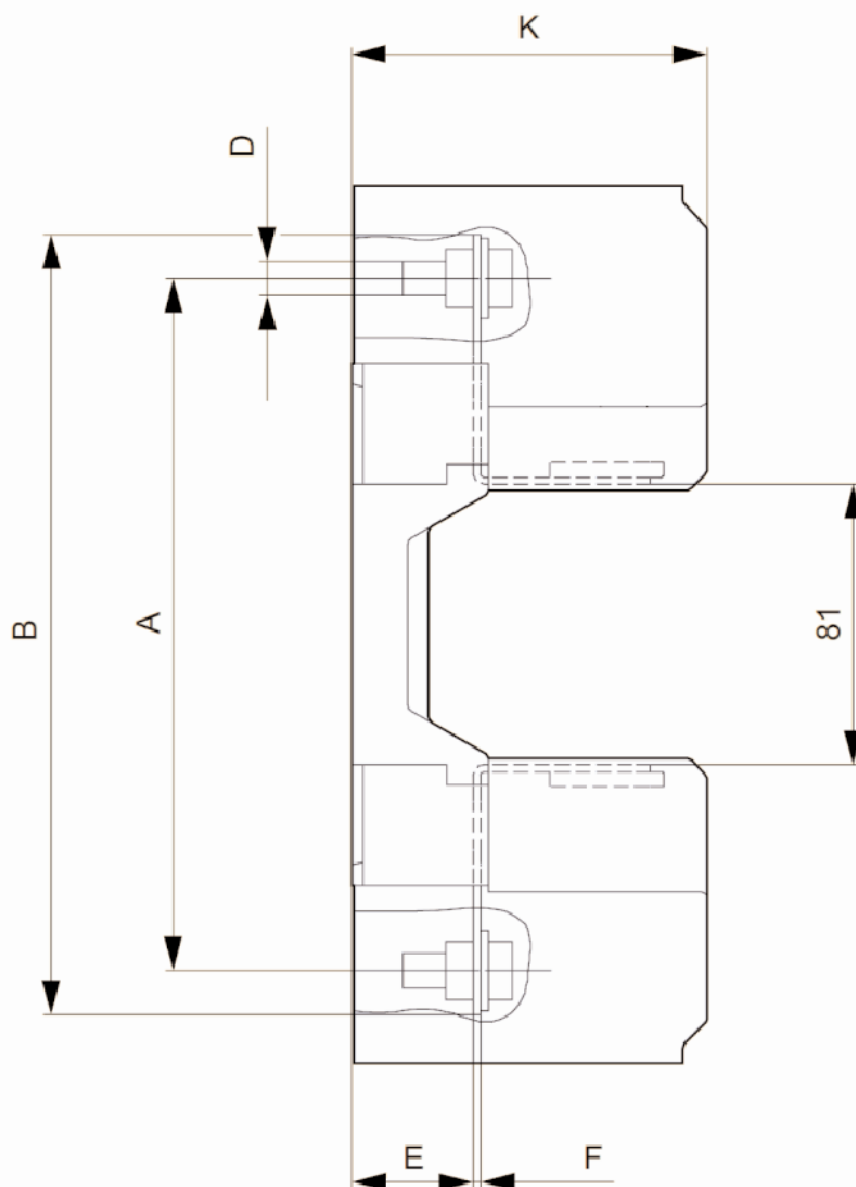

| Type | A   | B   | C   | D   | E  | F | G  | H  | I  | K   |
|------|-----|-----|-----|-----|----|---|----|----|----|-----|
| 1    | 175 | 200 | 254 | M10 | 35 | 2 | 59 | 64 | 34 | 103 |

| DESCRIPTION                             | EAN-CODE      | ORDER NO. |
|-----------------------------------------|---------------|-----------|
| HRC-fuse-base size 1 2xM10, 3pole, 400A | 9004840689006 | ISA05060  |