

www.schneider-electric.com

W9 1378085 0511 A06

10 - 2012

For Motor Starting Use Schneider Electric
Overload Relay Series LR.
电动机启动请使用施耐德电气LR系
列过载继电器。

**HAZARD OF ELECTRIC SHOCK, EXPLOSION,
OR ARC FLASH**
Disconnect all power before servicing equipment.
Failure to follow these instructions will result in
death or serious injury.
可能有触电、爆炸或者电弧灼伤的危险。
在此电力设备上进行操作时，请先断开所有电源。
不遵守上述规定将可能导致人员伤亡。

▲ DANGER / 危险

Philips N 2								Ø6		
mm	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm	C N.m	L mm	Ø mm
1 x 6,35 2 x 2,8	0,34 2,5	0,34... 2,5 + 0,34... 1,5	0,75 4	0,75... 4 + 0,75... 4	1,5 4	1,5... 4 + 1,5... 4	7	1.3	7	3



AWG : 1 x 18 min, 2 x 14 or 1 x 12 max

规格: 1 x 18最小值, 2 x 14或1 x 12最大值

Torque 1.3 N.m (12 lb-in) max

扭矩: 1.3 N.m (12 lb-in) 最大值

3P AC TeSys K contactors are grade 2 according
to GB 21518.
Maximum power consumption lower
than 5.0 VA.
根据GB 21518标准,
三极 TeSys K系列交流接触器能效等级为2级,
产品最大吸持功率低于5.0 VA

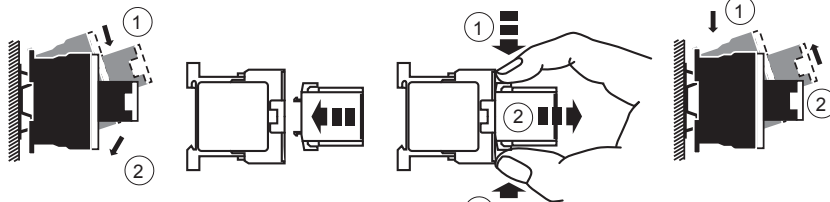**▲ WARNING / 警告****RISK OF FIRE OR ELECTRIC SHOCK (FOR CONTACTOR WITH
UL HI-FAULT SHORT CIRCUIT CURRENT RATINGS ONLY)**

The opening of the branch-circuit protective device may be an
indication that a fault current has been interrupted.


To reduce the risk of fire or electric shock, current-carrying parts and
the other components of the controller should be examined and
replaced if damaged.

**Failure to follow these instructions can result in death, serious
injury, or equipment damage.**


可能有火灾或者触电的危险 (仅限 UL 高故障短路电流额定值的接触器)。
支路保护设备断开, 表明故障电流已被中断。

为降低火灾或触电风险, 应检查带电部件和其它控制元件, 如有损坏,
需及时更换。


不遵循上述规定将可能导致人员伤亡或设备损坏。



LA4 KE.



- Surge suppressor
- Limiteur de surtension
- Überspannungsbegrenzer
- Limitatore di sovratensione
- Limitador de sobretensión
- Limitador de sobretensão
- 浪涌抑制器



LA4 KC.