



CLV640-6120

CLV64x

BAR CODE SCANNERS

SICK
Sensor Intelligence.



Ordering information

| Type | Part no. |
|-------------|----------|
| CLV640-6120 | 1042023 |

Other models and accessories → www.sick.com/CLV64x



Detailed technical data

Features

| | |
|-------------------------------------|--|
| Version | Standard Density |
| Connection type | Ethernet |
| Reading field | Oscillating mirror |
| Scanner design | Line scanner |
| Focus | Dynamic focus control |
| Light source | Visible red light (655 nm) |
| Light spot | Circular |
| Laser class | 2 (IEC 60825-1:2014, EN 60825-1:2014) |
| Aperture angle | ≤ 50° |
| Scanning frequency | 400 Hz ... 1,200 Hz |
| Code resolution | 0.2 mm ... 1 mm |
| Reading distance | 45 mm ... 755 mm ¹⁾ |
| Oscillating mirror functions | Fixed (adjustable position), oscillating (variable or fixed amplitude), one shot |
| Oscillation frequency | 0.5 Hz ... 6.25 Hz |
| Angle of deflection | -20° ... 20° |

¹⁾ For details see reading field diagram.

Mechanics/electronics

| | |
|------------------------------|--|
| Electrical connection | 2 x M12 cylindrical connectors (12-pin male connector, 4-pin female connector) on swivel connector |
| Supply voltage | 18 V DC ... 30 V DC |
| Power consumption | 6.5 W |
| Housing | Aluminum die cast |
| Housing color | Light blue (RAL 5012) |
| Front screen | Glass |

¹⁾ Swivel connector is 15 mm longer.

| | |
|-------------------------------|--------------------------------------|
| Enclosure rating | IP65 (EN 60529) |
| Protection class | III (EN 61140) |
| Weight | 350 g, without connecting cable |
| Dimensions (L x W x H) | 95 mm x 107 mm x 41 mm ¹⁾ |
| MTBF | 40,000 h |

¹⁾ Swivel connector is 15 mm longer.

Performance

| | |
|---|---|
| Readable code structures | 1D |
| Bar code types | All current code types, Code 39, Code 128, Code 93, Codabar, GS1-128 / EAN 128, UPC / GTIN / EAN, Interleaved 2 of 5, Pharmacode, GS1 DataBar, Telepen, MSI/Plessey |
| Print ratio | 2:1 ... 3:1 |
| No. of codes per scan | 1 ... 20 (Standard decoder) 1 ... 6 (SMART decoder) |
| No. of codes per reading interval | 1 ... 50 (auto-discriminating) |
| No. of characters per reading interval | 5,000 500 (for multiplexer function in CAN operation) |
| No. of multiple readings | 1 ... 99 |

Interfaces

| | |
|------------------------------|---|
| Ethernet | ✓, TCP/IP |
| Function | Host, AUX |
| Data transmission rate | 10/100 MBit/s |
| PROFINET | ✓ |
| Function | PROFINET Single Port, PROFINET Dual Port (optional via external connection module CDF600-2) |
| Data transmission rate | 10/100 MBit/s |
| EtherNet/IP™ | ✓ |
| Data transmission rate | 10/100 MBit/s |
| EtherCAT® | ✓ |
| Type of fieldbus integration | Optional over external fieldbus module CDF600 |
| Serial | ✓, RS-232, RS-422, RS-485 |
| Function | Host, AUX |
| Data transmission rate | 2,400 Baud ... 115.2 kBaud, AUX: 57.6 kBaud (RS-232) |
| CAN | ✓ |
| Function | SICK CAN sensor network CSN (master/slave, multiplexer/server) |
| Data transmission rate | 20 kbit/s ... 1 Mbit/s |
| CANopen | ✓ |
| Data transmission rate | 20 kbit/s ... 1 Mbit/s |
| PROFIBUS DP | ✓ |
| Type of fieldbus integration | Optional over external fieldbus module CDF600-2 |
| DeviceNet™ | ✓ |
| Type of fieldbus integration | Optional, over external connection module CDM + CMF |
| Digital inputs | 3 ("Sensor 1", 2 inputs via optional parameter storage CMC600 in CDB620/CDM420) |
| Digital outputs | 2 (Via optional CMC600 parameter memory in CDB620/CDM420) |

| | |
|-------------------------------|--|
| Reading pulse | Digital inputs, non-powered, serial interface, auto pulse, CAN |
| Optical indicators | 6 LEDs (Ready, Result, laser, Data, CAN, LNK TX, Bar graph for displaying the reading rate percentage (10 LEDs)) |
| Acoustic indicators | Beeper/buzzer (can be switched off, can be allocated as a result indication function) |
| Operating elements | 2 buttons (choose and start/stop functions) |
| Configuration software | SOPAS ET |
| Memory card | MicroSD memory card (flash card), optional |

Ambient data


| | |
|--|--|
| Electromagnetic compatibility (EMC) | EN 61000-6-3 (2001-10) / EN 61000-6-2:2005 |
| Vibration resistance | EN 60068-2-6 (1995) |
| Shock resistance | EN 60068-2-27 (1993) |
| Ambient operating temperature | 0 °C ... +40 °C |
| Storage temperature | -20 °C ... +70 °C |
| Permissible relative humidity | 90 %, Non-condensing |
| Ambient light immunity | 2,000 lx, on bar code |
| Bar code print contrast (PCS) | ≥ 60 % |

Classifications

| | |
|-----------------------|----------|
| ECl@ss 5.0 | 27280102 |
| ECl@ss 5.1.4 | 27280102 |
| ECl@ss 6.0 | 27280102 |
| ECl@ss 6.2 | 27280102 |
| ECl@ss 7.0 | 27280102 |
| ECl@ss 8.0 | 27280102 |
| ECl@ss 8.1 | 27280102 |
| ECl@ss 9.0 | 27280102 |
| ETIM 5.0 | EC002550 |
| ETIM 6.0 | EC002550 |
| UNSPSC 16.0901 | 43211701 |

Dimensional drawing (Dimensions in mm (inch))


CLV63x/64x/65x, JEF3xx, JEF5xx, Ethernet, oscillating mirror

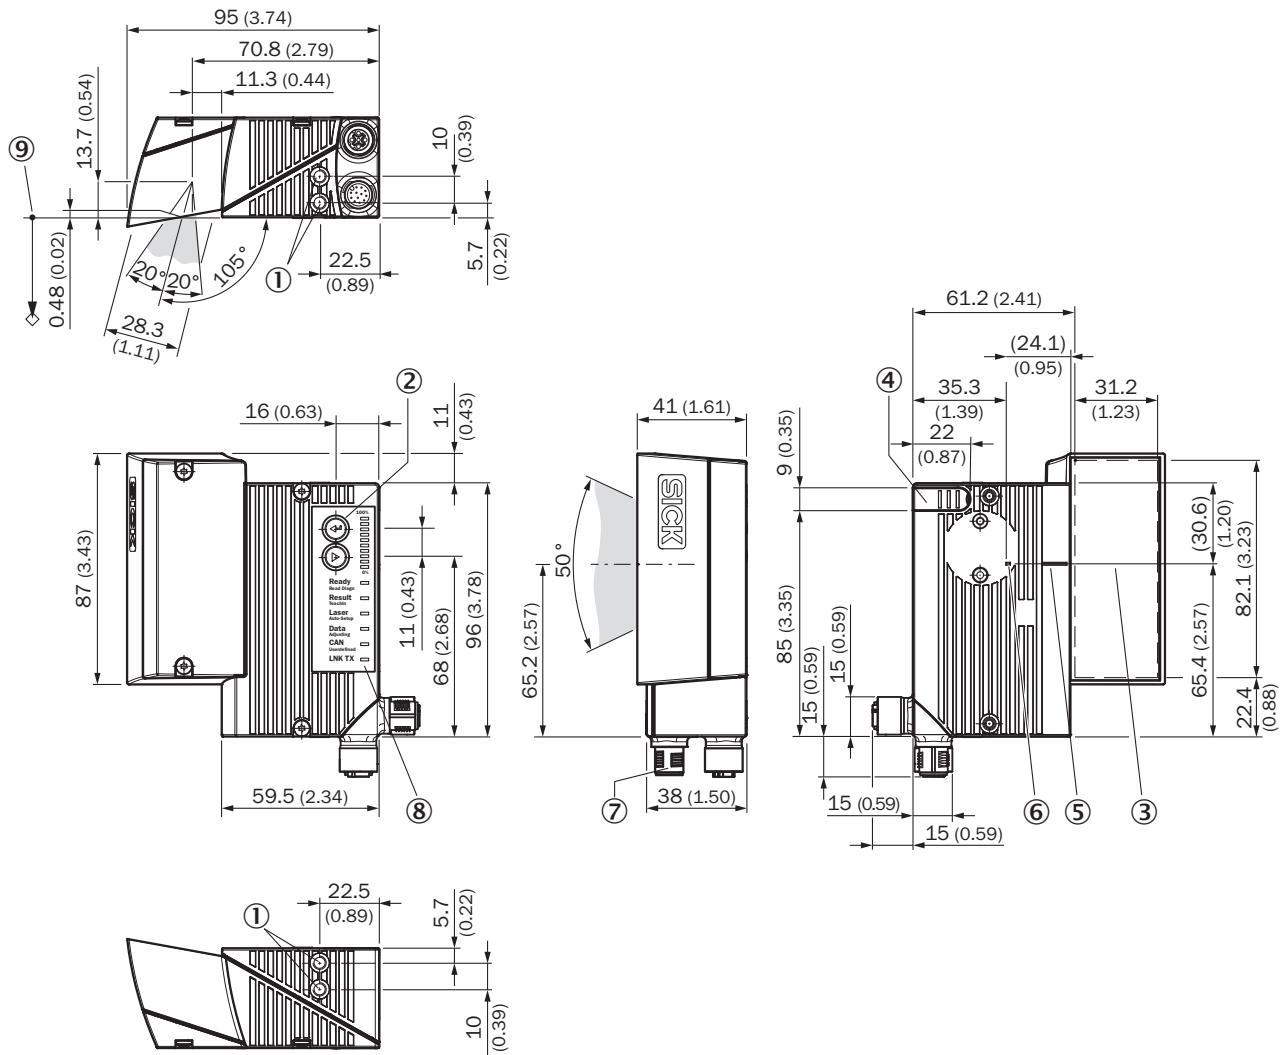

- ① Blind hole thread M5, 5 mm deep (2 x), for mounting
- ② Function button (2 x)
- ③ Reading field
- ④ Cover for the microSD memory card
- ⑤ Central position of the deflected laser beam in the V-shaped aperture angle
- ⑥ Internal impact point: rotation point of the variable direction laser beam
- ⑦ M12 round connectors (1 x 12-pin or 1 x 17-pin male connector, A-coded, 1 x 4-pin female connector, D-coded) with swivel connector
- ⑧ LED status indicator (6x) and bar graph
- ⑨ Reference point for reading distance (from housing edge to object)

Reading field diagram

Reading distance in mm (inch)

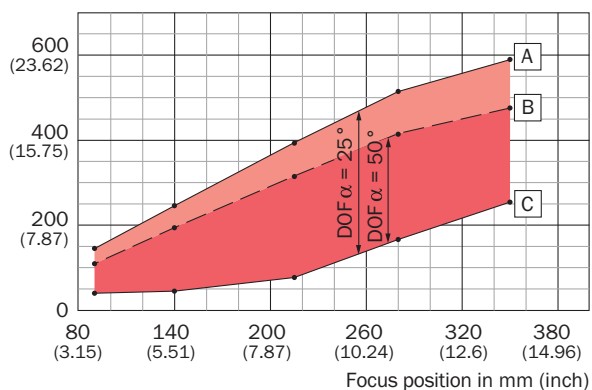

For devices with plastic reading window, the depth of field is reduced by approx. 10 %.

Resolution 0.5 mm (19.7 mil)

A max. reading distance (aperture angle 25°)

B max. reading distance (aperture angle 50°)

C min. reading distance

Recommended accessories

Other models and accessories → www.sick.com/CLV64x

| | Brief description | Type | Part no. |
|------------------------------|---|--|----------|
| Mounting brackets and plates | | | |
| | Hanger-shaped mounting bracket, thermally isolated for use with heating devices, mounting hardware included | Mounting bracket | 2050705 |
| | Hanger-shaped mounting bracket, mounting hardware included | Mounting bracket | 2042800 |
| Plug connectors and cables | | | |
| | Head A: female connector, M12, 12-pin, straight Head B: male connector, D-Sub-HD, 15-pin, straight Cable: Power, serial, CAN, digital I/Os, shielded, 2 m | Connection cable (male connector - female connector) | 2041834 |
| | Head A: male connector, M12, 4-pin, straight, D-coded Head B: male connector, RJ45, 8-pin, straight Cable: Ethernet, twisted pair, PUR, halogen-free, shielded, 2 m | SSL-2J04-G02ME | 6034414 |
| Modules | | | |
| | Small connection module for one sensor, 4 cable glands, base for CMC600 | CDB620-001 | 1042256 |
| | Modular connection module for one sensor | CDM420-0001 | 1025362 |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com