



RLY3-EMSS300

ReLy

SAFETY RELAYS

SICK
Sensor Intelligence.



Illustration may differ



Ordering information

| Type | part no. |
|--------------|----------|
| RLY3-EMSS300 | 1099973 |

Other models and accessories → www.sick.com/ReLy

Detailed technical data

Features

| | |
|--------------------------------|--|
| Applications | Evaluation unit |
| Compatible sensor types | Safety sensors with potential-free outputs |

Safety-related parameters

| | |
|---|--------------------------|
| Safety integrity level | SIL 3 (IEC 61508) |
| Category | Category 4 (ISO 13849-1) |
| Performance level | PL e (ISO 13849-1) |
| PFH_D (mean probability of a dangerous failure per hour) | 1.0 x 10 ⁻⁹ |
| T_M (mission time) | 20 years (ISO 13849-1) |
| Stop category | 0 (IEC 60204-1) |

Functions

| | |
|---|---|
| Sensor monitoring | Discrepancy monitoring Cross-circuit detection |
| Restart interlock | ✓ |
| Reset | Automatic Manual |
| External device monitoring (EDM) | ✓ |

Interfaces

| | |
|------------------------|---|
| Connection type | Front connector with spring terminals |
| Inputs | 2 safety inputs 1 input for reset pushbutton or external device monitoring (EDM) |
| Outputs | 3 enabling current paths (safe) 2 application diagnostic outputs (not safe) |

| | |
|-----------------------------|---------------------------------|
| | 3 test pulse outputs (not safe) |
| Display elements | LEDs |
| Configuration method | Hard wired |

Electronics

| | |
|---|---|
| Voltage supply | PELV or SELV |
| Supply voltage V_s | 24 V DC (16.8 V ... 30 V) |
| Residual ripple | ≤ 2.4 V |
| Power consumption | ≤ 2.5 W (DC) |
| Safety inputs | |
| Number | 2 |
| Input voltage HIGH | 24 V DC (11 V ... 30 V) |
| Input voltage LOW | 0 V DC (-3 V ... 5 V) |
| Input current | 4 mA ... 6 mA |
| Activation time tolerance between the two start buttons | ≤ 3 s |
| Reset pushbutton or external device monitoring (EDM) input | |
| Number | 1 |
| Input voltage HIGH | 24 V DC (11 V ... 30 V) |
| Input voltage LOW | 0 V DC (-3 V ... 5 V) |
| Input current | 4 mA ... 6 mA |
| Enabling current paths | |
| Response time (opening of enabling current paths) | 12 ms |
| Number | 3 |
| Type of output | N/O contacts, positively guided |
| Contact material | Silver alloy, gold flashed |
| Switching voltage | 10 V AC ... 230 V AC |
| | 10 V DC ... 230 V DC |
| Switching current | 10 mA ... 6 A |
| Total current | 12 A |
| Mechanical life | 1×10^7 switching cycles |
| Overvoltage category | III (EN 60664-1) |
| Rated impulse withstand voltage U_{imp} | 6 kV (EN 60664-1) |
| Application diagnostic outputs | |
| Number | 2 |
| Type of output | Push-pull semiconductor output, short-circuit protected |
| Output voltage HIGH | $\geq V_s - 3$ V |
| Output voltage LOW | ≤ 3 V |
| Input current (NPN) | ≤ 15 mA |
| Output current (PNP) | ≤ 120 mA |
| Test pulse outputs | |
| Number | 3 |

| | |
|---------------------|---|
| Type of output | PNP semiconductors, short-circuit protected |
| Output voltage | $\geq V_s - 3 \text{ V}$ |
| Test pulse width | 2 ms |
| Test pulse interval | 40 ms |

Mechanics

| | |
|-------------------------------|----------------------------|
| Dimensions (W x H x D) | 18 mm x 124.6 mm x 85.5 mm |
| Weight | 150 g |

Ambient data

| | |
|--------------------------------------|--|
| Enclosure rating | IP20 (IEC 60529) |
| Ambient operating temperature | -25 °C ... +55 °C |
| Storage temperature | -25 °C ... +70 °C |
| Air humidity | ≤ 95 %, Non-condensing |
| Interference emission | According to IEC 61000-6-4 |
| Interference resistance | According to IEC 61326-3-1 According to IEC 61000-6-2 According to IEC 60947-5-1 |

Certificates


| | |
|---------------------------------------|---|
| EU declaration of conformity | ✓ |
| UK declaration of conformity | ✓ |
| ACMA declaration of conformity | ✓ |
| China-RoHS | ✓ |
| CCC certificate | ✓ |
| UK-Type-Examination approval | ✓ |
| cULus certificate | ✓ |
| EAC certificate / DoC | ✓ |
| cTUVus certificate | ✓ |
| S Mark certificate | ✓ |
| EC-Type-Examination approval | ✓ |
| Third party certificate | ✓ |

Classifications

| | |
|---------------------|----------|
| ECLASS 5.0 | 27371990 |
| ECLASS 5.1.4 | 27371990 |
| ECLASS 6.0 | 27371819 |
| ECLASS 6.2 | 27371819 |
| ECLASS 7.0 | 27371819 |
| ECLASS 8.0 | 27371819 |
| ECLASS 8.1 | 27371819 |
| ECLASS 9.0 | 27371819 |
| ECLASS 10.0 | 27371819 |
| ECLASS 11.0 | 27371819 |
| ECLASS 12.0 | 27371819 |

| | |
|----------------|----------|
| ETIM 5.0 | EC001449 |
| ETIM 6.0 | EC001449 |
| ETIM 7.0 | EC001449 |
| ETIM 8.0 | EC001449 |
| UNSPSC 16.0901 | 41113704 |

Dimensional drawing EMSS3, LOOP1, MULT1, OSSD3

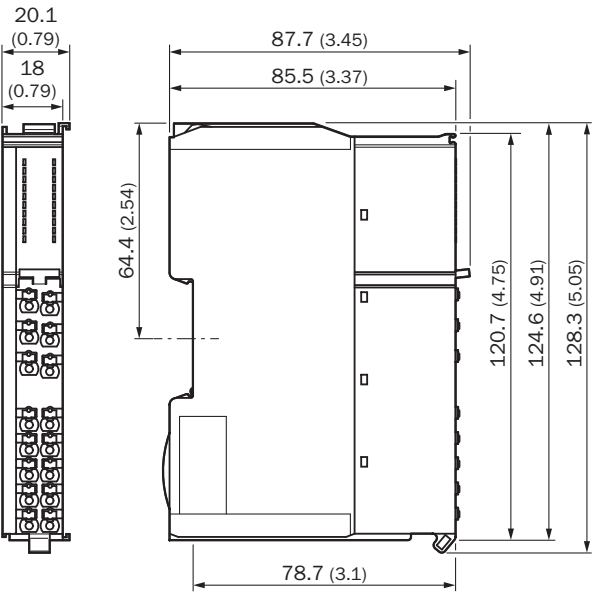

Dimensions in mm (inch)

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com