

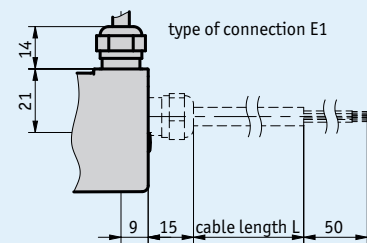


Profile




- Absolute wear-free magnetic encoder
- Multiturn without gearbox and without battery
- Interface SSI, IO-Link
- Extremely compact and very robust design
- IP67 protection class
- Extensive temperature range -40 ... 85° C
- Optimal price-performance ratio
- Industry 4.0 ready

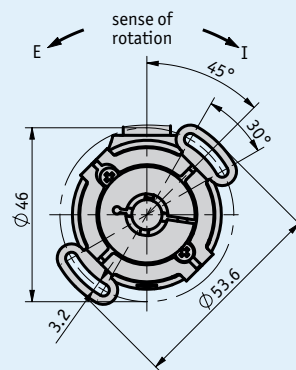

mounting type DS1

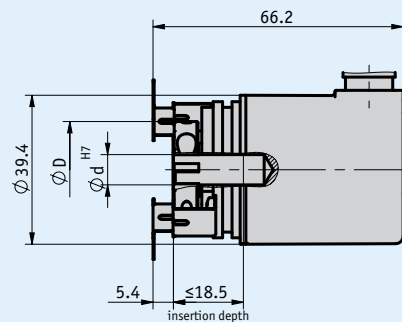

mounting type DS2

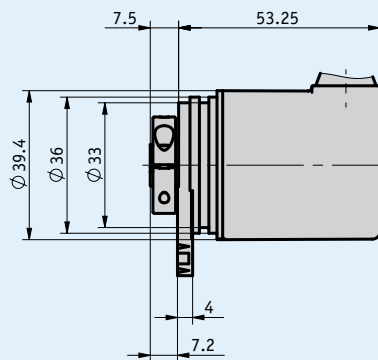

measure ød H7	measure øD
6	24
8	25.5
10	25.5
1/4 in	24

Mechanical data

Feature	Technical data	Additional information
Shaft	rustproof stainless steel	
Flange	aluminum	
Housing	zinc die-casting	
Speed	6000 rpm	at protection class IP65, transient for ≤10 min
	3000 rpm	at protection class IP65, continuous operation
	4000 rpm	at protection class IP67, transient for ≤10 min
	2000 rpm	at protection class IP67, continuous operation
Starting torque	<0.007 Nm at 20 °C	at protection class IP65
	<0.01 Nm at 20 °C	at protection class IP67
Shaft load rating	40 N	radial
	20 N	axial
Cable sheath	PUR	ø5.5 ±0.2 mm, with SSI
Cable bending radius	45 mm	static, at SSI
	65 mm	dynamic, at SSI
Mounting type	stator coupling	mounting type DS1
	spring element	mounting type DS2
Weight	~0.2 kg	

Electrical data

■ IO-Link interface

Feature	Technical data	Additional information
Operating voltage	18 ... 30 V DC	reverse-polarity protected
Current consumption	≤40 mA	without load
Parameter storage	10 ⁴ cycles	also applies to calibration operations
Status display	two-color LED (red/green)	device status
Interface	IO-Link Version 1.1	according to IEC 61131-9
Parameter	SIKO standard profile	IOL
	smart sensor profile	IOLssp
Type of connection	1x M12 connector (A-coded)	4-pole, 1x pin, E12E connection type

■ SSI interface

Feature	Technical data	Additional information
Operating voltage	10 ... 30 V DC	reverse-polarity protected
Current consumption	≤40 mA	without load
Parameter storage	10 ⁴ cycles	also applies to calibration operations
Digital inputs	2	calibration (SET), direction of rotation (DIR). Both inputs active at high (comparator).
Input signal level high	≥60 % from +UB	<+UB
Input signal level low	≤30 % from +UB	
SSI clock speed input	50 kHz ... 2 MHz	
Status display	two-color LED (red/green)	device status
Monoflop time	≤15 µs	
Interface	SSI	line driver according to RS485
Cycle time	2 ms	
Type of connection	1x M12 connector (A-coded)	8-pole, 1x pin, E12E connection type
	open cable end	E1 connection type

System data

Feature	Technical data	Additional information
Scanning	magnetic	
Resolution	12 bit	single-turn, 4096 steps/rotation, only at SSI
	13 bit	single-turn, 8192 steps/rotation, only at SSI
	14 bit	single-turn, 16384 steps/rotation
System accuracy	±1°	
Repeat accuracy	±0.2°	
Measuring range	1 revolution(s)	single-turn
	4096 revolution(s)	12 bit, only at SSI
	65536 revolution(s)	16 bit, only at SSI
	262144 revolution(s)	18 bit, only at IO-Link
	16777216 revolution(s)	24 bit, only at SSI

Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	-40 ... 85 °C	
Storage temperature	-40 ... 85 °C	
Relative humidity	93 %	condensation inadmissible
EMC	DIN EN 61326-1	immunity requirement of industry
	DIN EN 61000-4-2, -3, -6, -8	interference resistance / immission
	DIN EN 61000-4-4	burst
	DIN EN 61000-6-2	interference resistance / immission
	DIN EN 61000-6-4	emitted interference / emission
	DIN EN 55011 Classes A and B	radiation emission / radio interference suppression
Protection category	IP65	EN 60529
	IP67	EN 60529
Shock resistance	2500 m/s ² , 6 ms	EN 60068-2-27
Vibration resistance	300 m/s ² , 10 ... 2000 Hz	EN 60068-2-6

Pin assignment

■ SSI, E12E

Signal	PIN
GND	1
+UB	2
T +	3
T -	4
D +	5
D -	6
SET	7
DIR	8

■ SSI, E1

Signal	Color
GND	white
+UB	brown
T +	green
T -	yellow
D +	gray
D -	pink
SET	blue
DIR	red

■ IO-Link, E12E

Signal	PIN
L+ (+UB)	1
nc	2
L- (GND)	3
C/Q	4

Industry 4.0

In most cases, data exchange with the absolute rotary encoder is limited to the exchange of process data. In addition to the process data, the rotary encoder provides additional information with an IO-Link interface that can be evaluated for condition monitoring up to predictive maintenance:

Process Data	Smart Value	Smart Function
Actual position	Temperature	Condition monitoring
Speed	Limit speed	Application overload
	Operation hours counter	Operating time
	Acceleration events	Activation of PLC functions
	Speed events	Activation of PLC functions
	Electronic type label	Asset management

Order

Ordering table

Feature	Ordering data	Specification	Additional information
Interface/protocol	IOL	A IO-Link SIKO standard profile	
	IOLssp		
	SSIb		
	SSIg		
Steps per revolution	4096	B 12 bit	only with SSI
	8192		only with SSI
	16384		only with IO-link
Number of revolutions	1	C singleturn	
	4096		only with SSI
	65536		only with SSI
	262144		only with IO-link
	16777216		only with SSI
Hollow shaft/diameter	6	D ø6 mm	
	8		
	10		
	1/4		
Mounting type	DS1	E stator coupling	
	DS2		
Protection category	IP65	F IP65	
	IP67		
Position of electrical connection	A	G axial	
	R		
Type of connection	E1	H open cable end	only with SSI
	E12E		plug
Cable length	...	I 01.0, 02.0, 05.0, 10.0 in m	only with connection type E1
	OK		without cable

Order key

WH3650M - A - B - C - D - E - F - G - H - I - S

Scope of delivery: Quick Start Guide, WH3650M

Accessories:

Mating Connector Overview

Mating connector, 4-pole, socket

Mating connector, 4-pole, angle socket

Mating connector, 8-pole, socket

Mating connector, 8-pole, angle socket

www.siko-global.com

Order key 83526

Order key 83091

Order key 83525

Order key 87599