


# Product data sheet

Specifications

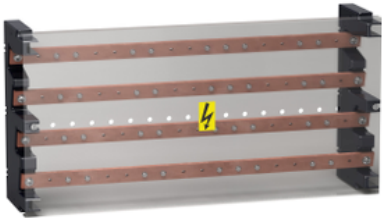

## LINERGY BS 4P MULTISTAGE BB 400A 52HOLES

04054

⚠ Discontinued on: 11 January 2022

⚠ Discontinued

### Main

Range	Linery
Range of product	Linery
Product or component type	Multi-stage distribution block
Product name	Linery BS
Range compatibility	Prisma G enclosure Prisma P enclosure
Product compatibility	Spacial enclosures
IP degree of protection	IPxx B

### Complementary

Mounting support	Prisma upright Plain backplate Slotted backplate
Mounting mode	Horizontal Vertical
Poles description	4P
[Ue] rated operational voltage	440 V AC
[Ui] rated insulation voltage	750 V AC
[Uimp] rated impulse withstand voltage	8 kV
[Ie] rated operational current	400 A
[In] rated current	400 A at 40 °C
[Icw] rated short-time withstand current	20 kA for 1 s
[Ipk] rated peak withstand current	40 kA
I²t on activation	400000000 A².s
Busbar cross section	32 x 5 mm
Connections - terminals	Supply: crimped lug50 mm² Supply: flexible bars, 32 x 5 mm Distribution: M6 holes (phase) , 13 x 1...50 mm²
Height	235 mm
Width	470 mm

Depth	115 mm
Net weight	4.2 kg

### Environment

Standards	IEC 61439-2 EN/IEC 61439-1
Product certifications	ASEFA

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	4.11 kg
Package 1 Height	15.5 cm
Package 1 width	25.5 cm
Package 1 Length	55.0 cm
Unit Type of Package 2	P12
Number of Units in Package 2	30
Package 2 Weight	126.0 kg
Package 2 Height	93.0 cm
Package 2 width	80.0 cm
Package 2 Length	120.0 cm

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


### Contractual warranty

Warranty	18 months
----------	-----------

### Recommended replacement(s)

04054 is replaced by:

1x



LINERGY BS 4P MULTISTAGE BB 400A 52HOLES  
LVS04054