

Data Sheet for Article: MGF67500-A

Voltmeter, 72x72mm, 500VAC

Type Front mounting, Function voltmeter AC, Size 72x72mm, Measuring range 500V, IP Rating IP52 (front), IP00 (connections)




Technical Data

Type	Front mounting
Measuring range	500V
Size	72x72mm
Display technology	analog
Standard	EN 50081 BS-89 VDE 0410 EN 60051 EN 50082 EN 61010
Accuracy	1,50 percent
Overload (continuous)	1,2 Vn
Overload (short-time)	2Vn 5s
Isolation test voltage	2 kV R.M.S 50 Hz/1 min
Reference temperature (°C)	+10 bis +30
Temperature range - Transport/storage (°C)	-25 to +40
Power loss (W)	0,20
Mounting method	Instrument for vertical mounting


Technical Data - continued

IP Rating	IP52 (front), IP00 (connections)
Burden	3,0VA
Frequency range	45-65Hz
Vibration resistance	VDE 0410, 2,5g, $\pm 0,25$ mm, 50Hz
shock resistance	VDE 0410, 15G

Circuit diagram: Voltmeter, 72x72mm, 500VAC

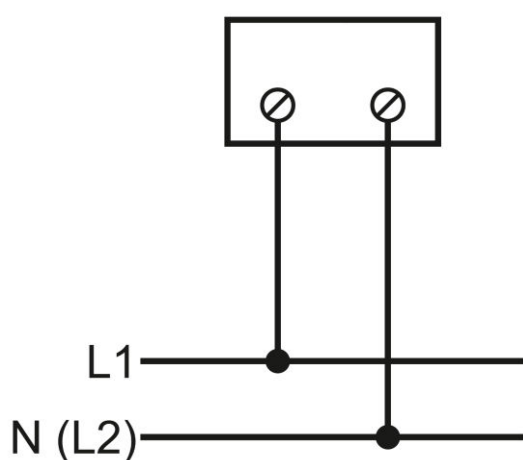

Dimensioned drawing: Voltmeter, 72x72mm, 500VAC

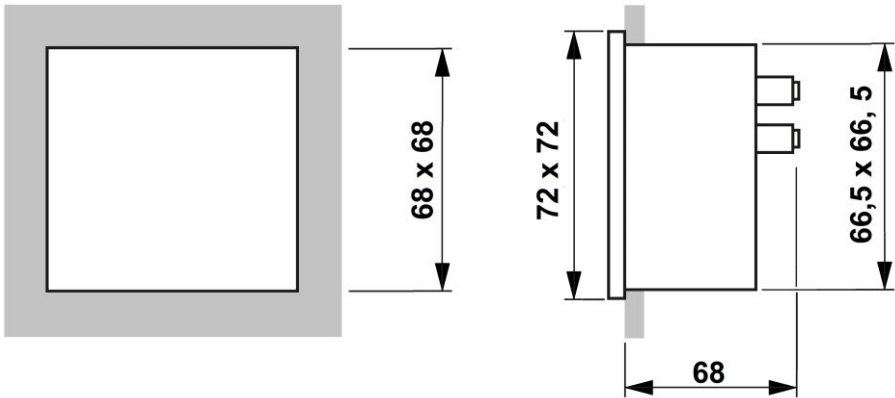

DESCRIPTION	Order No.
Voltmeter, 72x72mm, 500VAC Type Front mounting, Function voltmeter AC, Size 72x72mm, Measuring range 500V, IP Rating IP52 (front), IP00 (connections)	MGF67500-A